

INSTRUCTION



●Thank you for purchasing KOSO **mini thermometer**, please read the instruction throughly befor installing.

⚠ Notice

- 1. The LCD meter is apply for CR 2032 (LCD display), DC 12V (Back light).
- 2. For installation, please follow the steps described in manual. Any damage caused by wrong installation shall be imputed to the users.
- 3. To avoid the short circuit, please don't pull the wire when installing, don't break or modify the wire terminal.
- 4.Do not disassemble or change any parts excluding the manual description.
- 5. The interior examination or maintenance should be executed by our professionals.

NOTE You could get the installation details from the information behind the mark.

⚠ Some processes must be followed to avoid the affection caused by wrong installation.

A WARNING! Some processes must be followed to avoid damages to yourself or the public.


A CAUTION! Some processes must be followed to avoid the damage to the vehicle.






PRESS THE BUTTON ONE TIME

1 Accessory






















the sar NOTE Please contact the local distributor if the items you open are not with the above-listed one.


2-1 Installation instructions




those steps when installing.

- 1.LCD meter (Accessory 1) 2.HEX socket set screw (Accessory 4)
 - 3.Nut (Accessory 5)
- 4.Meter Cover (Accessory 2)
- **B 1.**LCD meter (Accessory 1)
- 2.Meter Cover (Accessory 2)
- 3.Velcro-Male (Accessory 7)
- NOIE Please choose either Method A or B according to your need to install.

2-2 Battery installation instructions

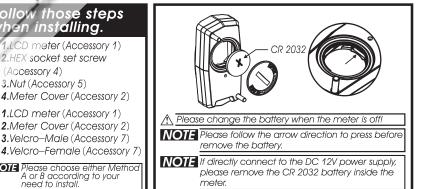

2-3 Wiring installation instructions

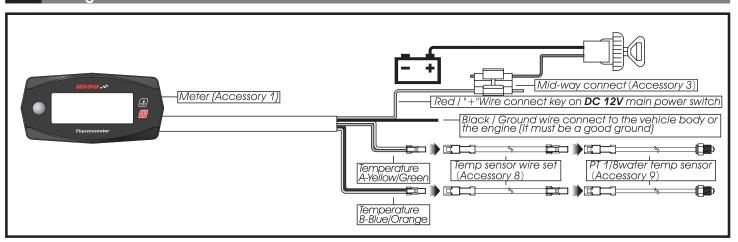

Cortesia www.marcadoresdemoto.com

3 Basic function instruction



■Thermometer A,B Display range: -25°C ~250°C (-13°F ~482 °F)

Display unit: 0.1°C (°F)

Temperature Warning Range: Settable temperature warning range. Display will flash when the temperature is higher than (or equals to)the setting value.

Battery type

Battery life time About 230 H (when battery volume below 250 mAh)

Effective temperature range -10~60°C JIS D 0203 Meter standard

Meter size W69.8 X L34.4 X H17.2 mm

Meter weight Around 47.6g

NOTE Design and specifications are subject to change without notice!

4-1 Temperature Unit and Warning Range Setting Instruction



Press and hold the button for 3 seconds to startup the meter

 Keep pressing the button for another 3 seconds to enter the unit setting.

●Figure: It's current main screen for Temp. A



Temperature Unit Setting: Press and hold the button for 3 seconds to enter the setting screen.

Press the button once shortly to enter the W-1 setting screen.



Press the button once shortly to switch between Degree Celsius and Degree Fahrenheit.

Press and hold the button for 3 seconds to return the unit setting screen.



●W-1 Setting Screen: Press and hold the button for 3 seconds to enter the setting screen.

Press the button once shortly to enter the W-2 setting screen.



W-1 Setting. Press the button once shortly can adjust the value of the

rress and hold the button for 3 seconds to enter the second digit adjustment. Press and hold the butto



Press the button once shortly can adjust the value of the second digit.

Press and hold the button or 3 seconds to enter the third digit adjustment.



Press the button once shortly can adjust the value of the third digit.

Press and hold the button for 3 seconds to return the W-1 screen.



W-2 Setting Screen: Press and hold the button for 3 seconds to enter setting screen.



e button once shortly ist the value of the

ess and hold the button 3 seconds to enter the econd digit adjustment.



Press the button once shortly can adjust the value of the second diait.

Press and hold the button for 3 seconds to enter the third digit adjustment.



 Press the button once shortly can adjust the value of the third digit.

 Press and hold the button for 3 seconds to return the Temp A main screen.

<u>A WARNING!</u> Please don't check the record during riding to avoid the accident.

NOTE W-1 represent the Temperature Warning Range A and W-2 represent the warning range B.

4-2 Instruction for Main Screen



●Figure: Current Screen for Temperature A Press the button once shortly to switch to the screen of Temperature B



Figure: Current Screen for Temperature R Press the button once shortly to switch to A.B Max Record



●Figure: Temp. A MAX Record





●Figure: Temp. B MAX Record

Battery installation instructions



■To erase the MAX record for Temp. A.

Press and hold the button for 3 seconds under Temp. A MAX Record screen to erase the record for Temp. A.



To erase the MAX record for Temp. B. Press and hold the button for 3

seconds under Temp. B MAX Record screen to erase the record for Temp. B.



OR



●Turn Off:

 $\bar{1}$. When using CR 2032 battery,press and hold the button for 3 seconds

When using CN 2002 band, passes and the second of the

5 Trouble shooting

The following situation do not indicate malfunction of the meter. Please check the following before taking it in for repair.

Trouble-1	Check Item	Trouble-2	Check Item
The meter shows wrong information.		Under the Key Off status, the meter screen doesn't go off.	●it's highli possible that the CR 2032 battery hasn't been removed. →Please press and hold the button for 3 seconds, and confirm whether the meter is turned off or not.